

HT- 4000/2000 Series SPECIFICATIONS

Function	HT-4212	HT-4212H	HT-2212	HT-2212H
Processor	Intel Celeron 2.0 GHz (upgradable to P4 2.4GHz)		AMD NX 1100	
Memory	Default 256MB Expandable to 2GB DDR Memory 2 DIMM Sockets		Default 128MB Expandable to 2GB DDR Memory 2 DIMM Sockets	
Video memory	16MB - 128MB, Shared with system memory			
Display	12.1" TFT LCD, 800 x 600, 180 nits			
Tilt adjustment	From 42.5° to 77.5°			
Touch sensor	N/A	Resistive type	N/A	Resistive type
Touch resolution(optional)	1024 X 1024, Mouse emulation			
Expansion				
PCI slot	1 X			
Condition (1)	PCI slot is occupied & not available while powered USB control card is installed.		N/A	
Condition (2)	PCI slot is available for use while powered USB control card is not installed.		N/A	
Hard disk drive (Ultra DMA)	40GB			
2nd HDD	2.5", OPTIONAL			
Power management kit	OPTIONAL		INCLUDED	
Main features	1.Power-off prevention software 2.Uninterrupted power system(UPS) control 3.CR port control			
Integrated battery backup (available by special request)	Optional (Power Management kit required) Battery is not included, purchased respectively			
Connectivity				
Powered USB ports (12V/24V powered)	Proprietary control card, OPTIONAL		N/A	
USB ports	3 X		6 X	
RS232 ports	4 X		2 X	
VGA port	1 X			
Stereo audio out / mic in	YES			
Ethernet 10/100 (onboard LAN)	YES			
Parallel port	1X			
PS/2 KB & MOUSE	YES			
Cash drawer port (CR PORT)	1x, option (included in power management kit)		1X	
Operating systems	Win 2000 / XP Professional / WEPOS			
Color options	Charcoal / Ivory white			
Physical dimensions				
Terminal	270mm(W)X240mm(D)X102.5MM(H)(10.6"X9.5"X4.0")			
Display	288MM(W)X130.5MM(D)X255MM(H)(11.3"X5.1"X8.9)			
Weight	6.15 kgs (13.6 lbs.)	6.5 kgs (14.3 lbs.)	5.12 kgs (11.3 lbs.)	5.45 kgs (12 lbs.)
Electrical requirements	Switching power supply: Input 115/230V, output DC 180W		AC adaptor:Input 100-240V, output DC 12V/80W	
Safety certifications	PSU:UL/TUV mark Terminal:FCC,CE(class A)			
Optional peripherals				
SD-300	USB Interface, 2-in-1 MSR and finger print sensor; MSR is UPOS 1.8 compliant.(MSR/FP Optional)			
BC-200	Bar Code card reader,USB interface			
LM-2010	10.4" color LCD TFT as second display			
PD-2601	2x20 VFD customer display, 5x7 dots matrix RS232 interface default (USB interface optional)		2X20 VFD customer display, 5X7 dots matrix USB interface default(RS232 interface optional)	

Information and specifications in this catalogue are subject to change without notice.

Posiflex Incorporated
6., Wu-Chuan Road, Wu-Ku, Taipei Hsien, Taiwan
TEL: +886.2.2299.1599 (Rep.) FAX: +886.2.2299.1819/1808
posiflex@posiflex.com.tw www.posiflex.com



2006 V.01

POSIFLEX
Your Success is Our Vision



POS Terminal HT- 4000/2000 Series

Flexible and high Performance POS solution from POSIFLEX




POS Terminal HT- 4000/2000 Series

- Instinctive-to-operate POS terminal design
- Screwless and spill-proof architecture
- LED indicators on the LCD front panel for power/standby/battery & LAN Link status check
- Effective cable management design of all cables - allows easy routing of cables for aesthetics and safety measures.
- Power guard prevention feature with software power switch controlled of system to prevent accidental shutdown (this feature is activated by optional power management kit)

Ivory white



Features

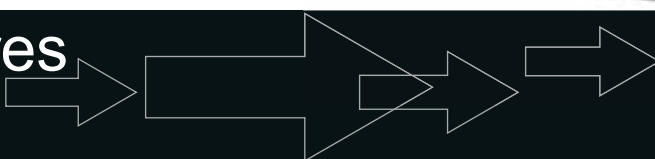

HT system
Charcoal



MSR Attachment 2-in-1
MSR and finger print
sensor(SD-300)



Ergonomic design allows
LCD display swivel angle
0° to 16° in clockwise
direction for improved
viewing angles



A patented finger release
lever "Gear Lock"
mechanism easily adjusts the
LCD tilt angle from 42.5° to
77.5°



Cable management
design allows easy routing
of cables for aesthetics
and safety measures

Available peripherals



Cash Drawer (CR Series)



POS Programmable
Keyboard (KB Series)



POS Printer
(AURA/PP Series)



Customer Pole Display
(PD-2601)

POS Terminal HT- 4000/2000 Series

Designed for retail environments and applications that require a compact system with an instinctive design concept powerful enough to meet best-of-breed POS (application market) demands.