

ProxKey® II Fob

125 kHz Proximity

Proximity Keyfob • 1346



ACCESS reliability.



Application

The RF-programmable ProxKey® II proximity keyfob incorporates proximity technology into a convenient device approximately the size of an automotive key.

Features

- ▶ Offers universal compatibility with all HID proximity readers.
- ▶ Provides an external number for easy identification and control.
- ▶ Can be placed on a key ring for convenient entry.
- ▶ Supports formats up to 85 bits, with over 137 billion codes.
- ▶ Using HID's ProxProgrammer®, card vendors can ship proximity keyfobs, custom programmed to their customers' requirements, from their own inventory. Enables smaller order quantities and overnight delivery. (Check with vendor for availability.)

Features

Proven, Reliable Technology

Offers extremely consistent read range. Unaffected by body shielding or variable environmental conditions, even when close to keys and coins.

Small and Convenient

Can be carried with keys in pocket or handbag.

Cross-reference

A cross-reference list correlating the external card number and the programmed ID number is provided for easy system administration.

Security

Offers over 137 billion unique codes.

Long Life

Passive, no-battery design allows for an infinite number of reads.

Durability

Strong, flexible and resistant to cracking and breaking.

Warranty

Lifetime warranty against defects in materials and workmanship (see complete sales policy for details).

Specifications

Typical Maximum* Read Range

ProxPoint® Plus reader-up to 1.5" (3.7 cm)

MiniProx™ reader-up to 2" (5 cm)

ThinLine® II reader-up to 2" (5 cm)

ProxPro® reader-up to 3" (7.5 cm)

ProxPro® II reader-up to 4" (10.2 cm)

Prox80™-up to 2" (5.1 cm)

MaxiProx® reader-up to 12" (28 cm)

*Dependent on local installation conditions.

Dimensions

1.90" x 0.900" x 0.550"

(4.3 x 2.29 x 1.4 cm)

Keyfob Construction

Ultrasonically welded, ABS shell

Operating Temperature

-50° to 160° F (-45° to 70° C)

Weight

0.26 oz. (7.4 gm)

Part Number

Base Part No. I346


Description

RF-programmable, 125 kHz, charcoal gray, customer-specified ID Numbers, key ring included.

Options

- External card numbering (inkjet or laser engraving)

(Please see "How to Order Guide" for a description of the options and associated part numbers.)

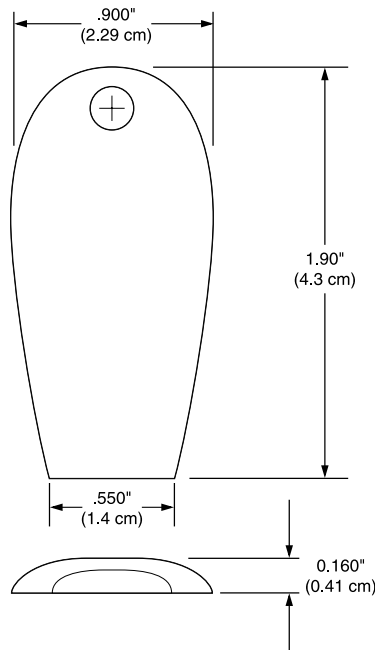

© 2007 HID Global. All rights reserved. HID, and the HID logo are trademarks or registered trademarks of HID Global in the U.S. and/or other countries. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners. Rev. 4/2007



For best results, please print on recycled paper.

MKT-PROXKEYii_DS_EN



ACCESS experience.

hidcorp.com

HID Global Offices:

Corporate North America
9292 Jeronimo Road
Irvine, CA 92618-1905
U.S.A.
Phone: (800) 237-7769
Phone: (949) 598-1600
Fax: (949) 598-1690

Asia Pacific
19/F 625 King's Road
North Point
Island East
Hong Kong
Phone: +852 3160-9800
Fax: +852 3160-4809

Latin America
Circunvalacion Ote. #201 B
Despacho 2
Col. Jardines del Moral
Leon 37160, Gto.
Mexico
Phone: +52 477 779 1492
Fax: +52 477 779 1493

Europe, Middle East & Africa
Homefield Road
Haverhill, Suffolk
CB9 8QP
England
Phone: +44 (0) 1440 714 850
Fax: +44 (0) 1440 714 840